


AUSTIN


SLIM Three-Way Hydromassage Shower Column

DESCRIPTION

Shower panel in matte black stainless steel with square design and slim profile. Equipped with anti-limescale silicone showerhead, vertical hydromassage jets and 3-way mechanical mixer. Complete with single-spray hand shower with 150 cm hose, 35 cm connection hoses and fixing kit included. System connections: H 100-110 cm, L 10-15 cm.

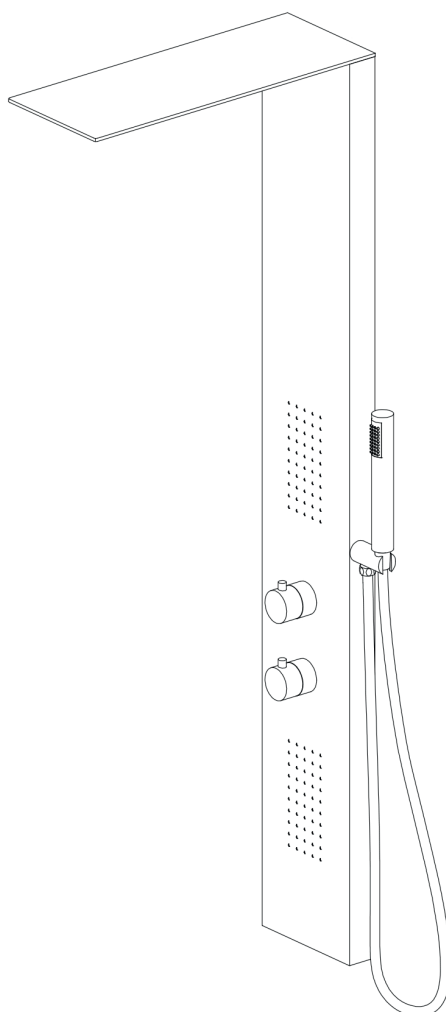


PRODUCT DIMENSIONS

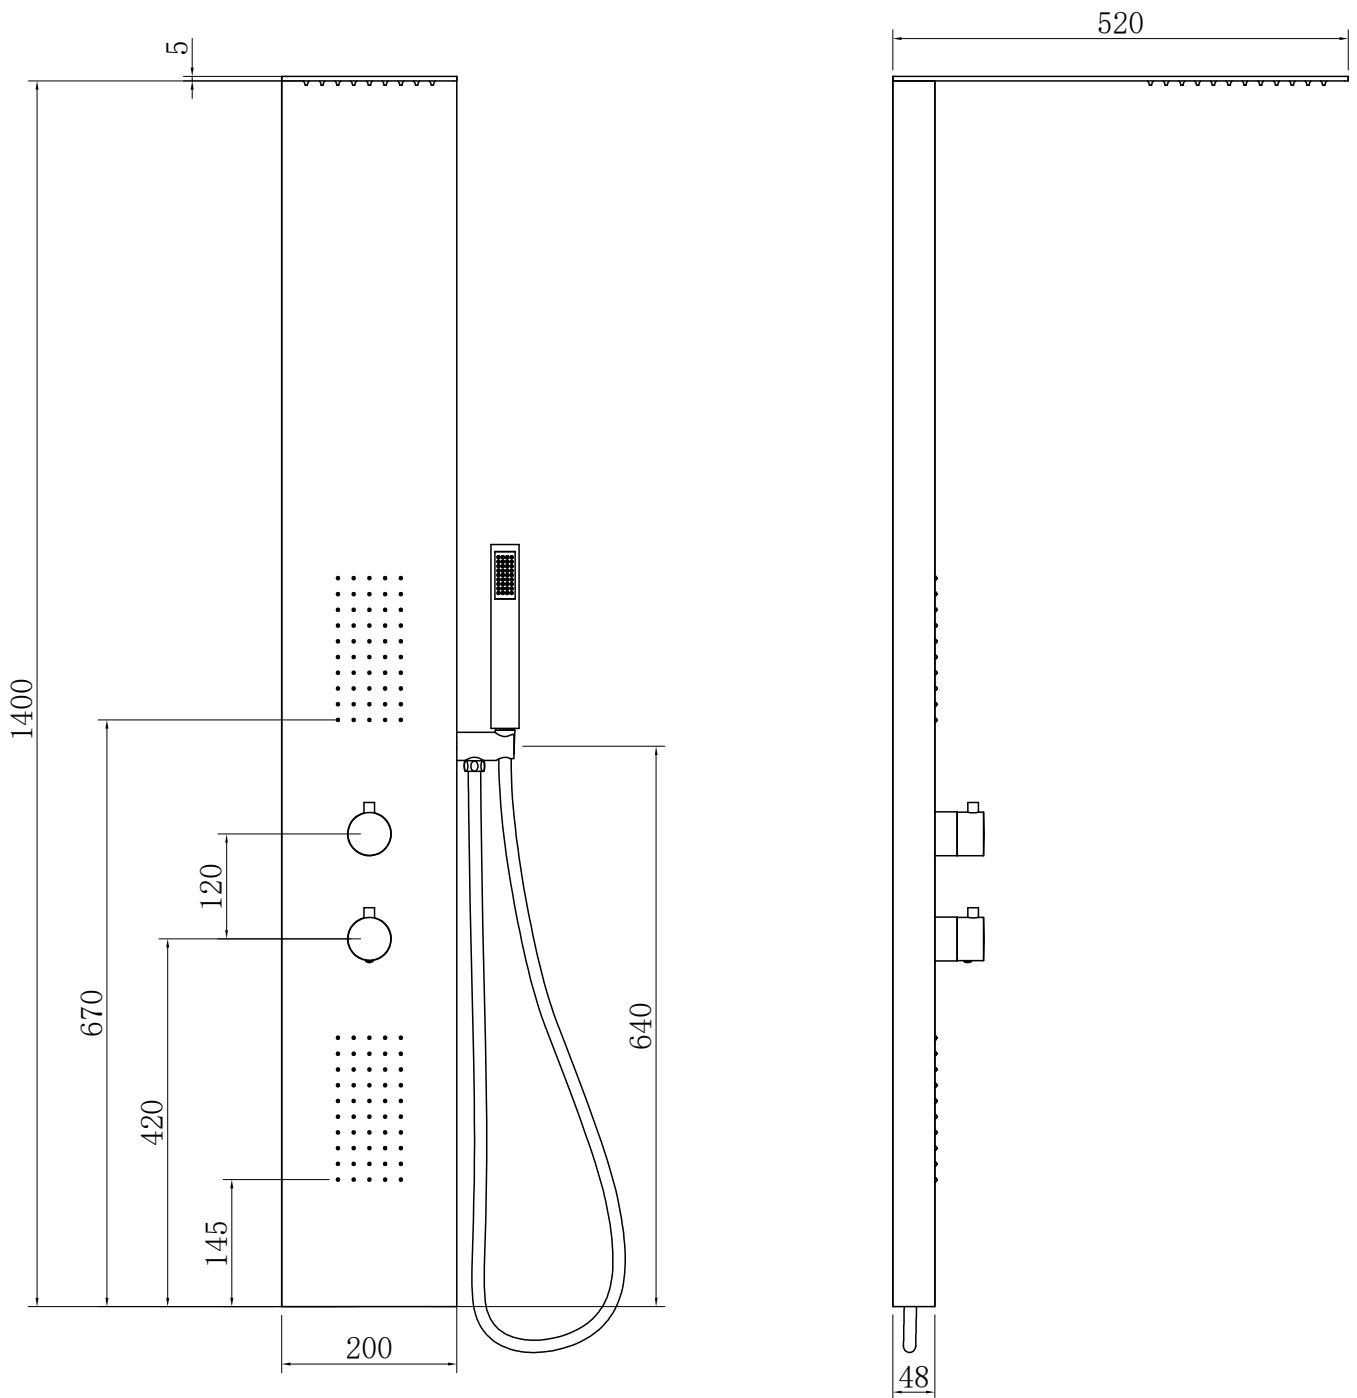


TECHNICAL INFORMATION

For ideal positioning of the shower column, the top jet should be at a total height of 210 cm from the floor. Hot and cold water connections should be positioned at 100-110 cm from the floor, with a distance between them of 10-15 cm.

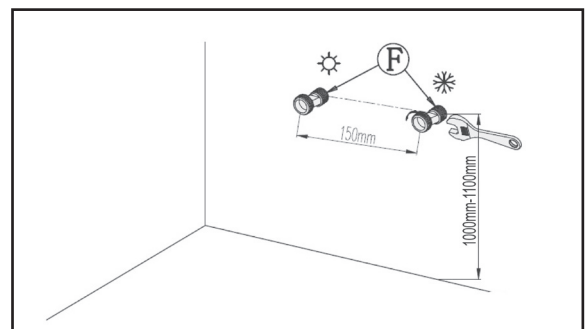


AUSTIN

NECESSARY TOOLS

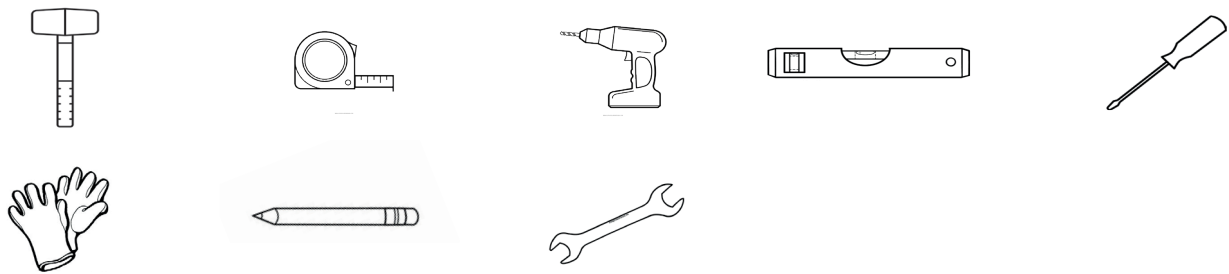

PACKAGE CONTENTS

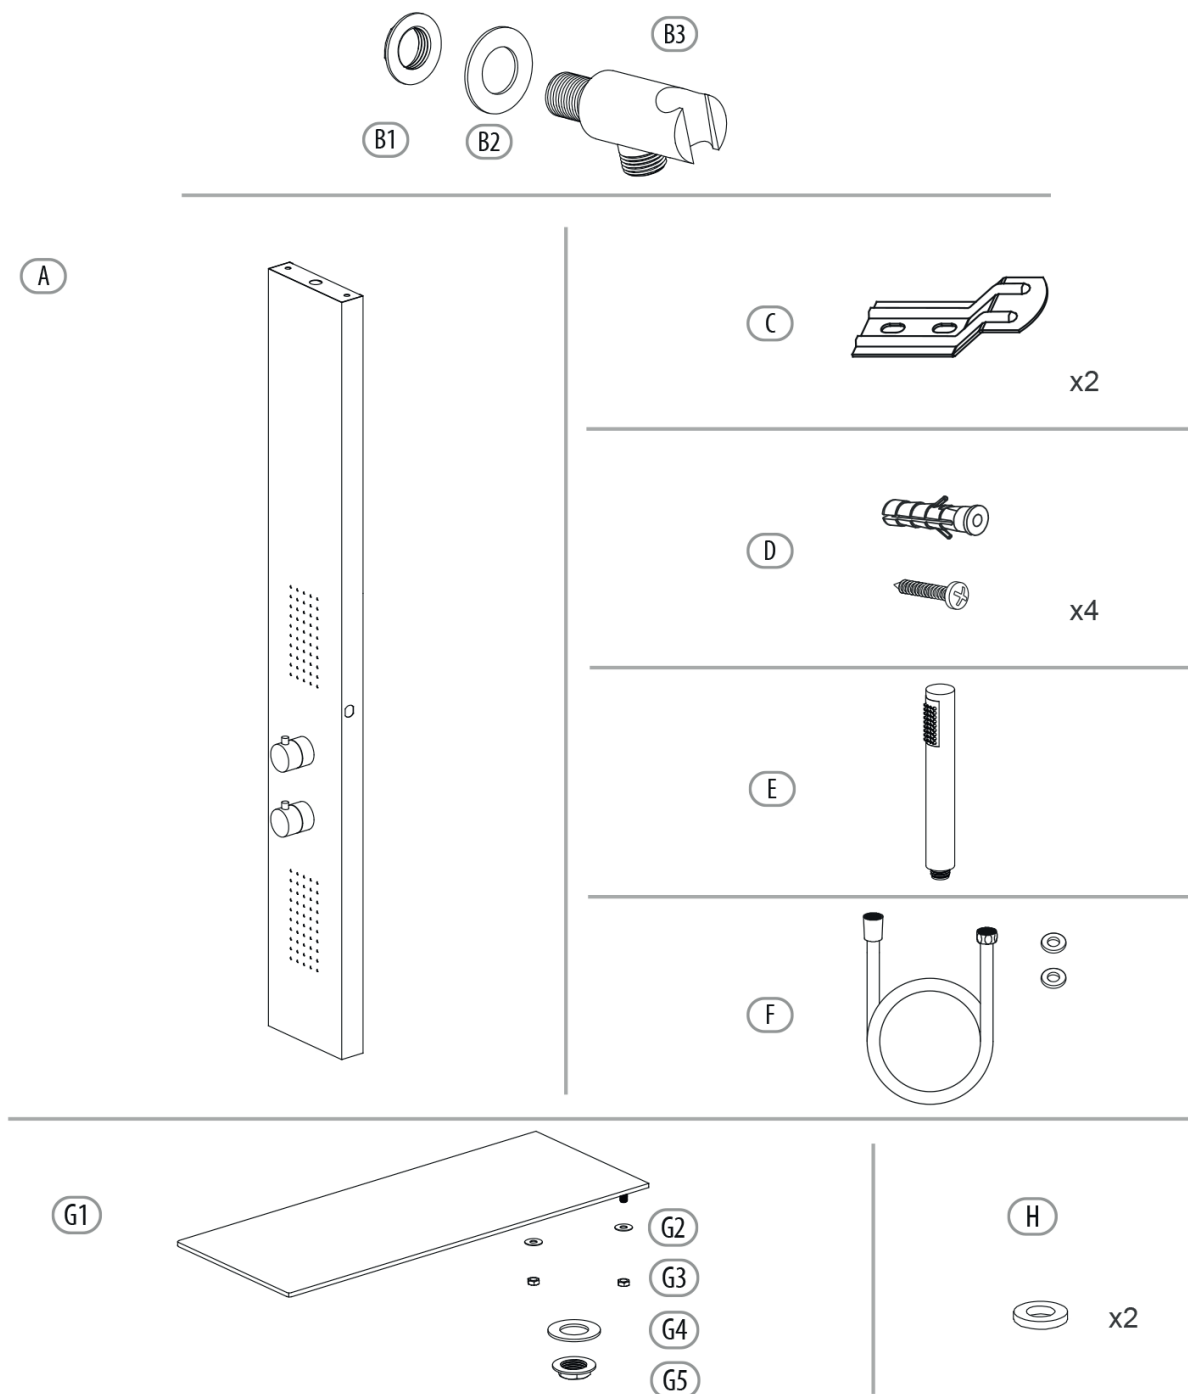

IMPORTANT

Before connecting the hydromassage shower panel to the water system, it is mandatory to carry out a thorough system flushing.

This procedure is essential to remove debris, sand, lime fragments, or other residues that may have settled inside the pipes after construction or plumbing works.

Failure to flush the system may compromise the correct functioning of the panel, damaging the ceramic cartridges and internal diverters, which are not covered by the warranty in case of damage caused by debris in the system.

Procedure:

Fully open the hot and cold water valves at the ends of the hoses or at the connection point to the panel.


Let the water flow for at least 2 minutes or until the stream is completely clean and free from impurities.

Ensure there are no visible foreign bodies.


Only after completing the flushing operation, connect the shower panel.

MOUNTING


STEP 1

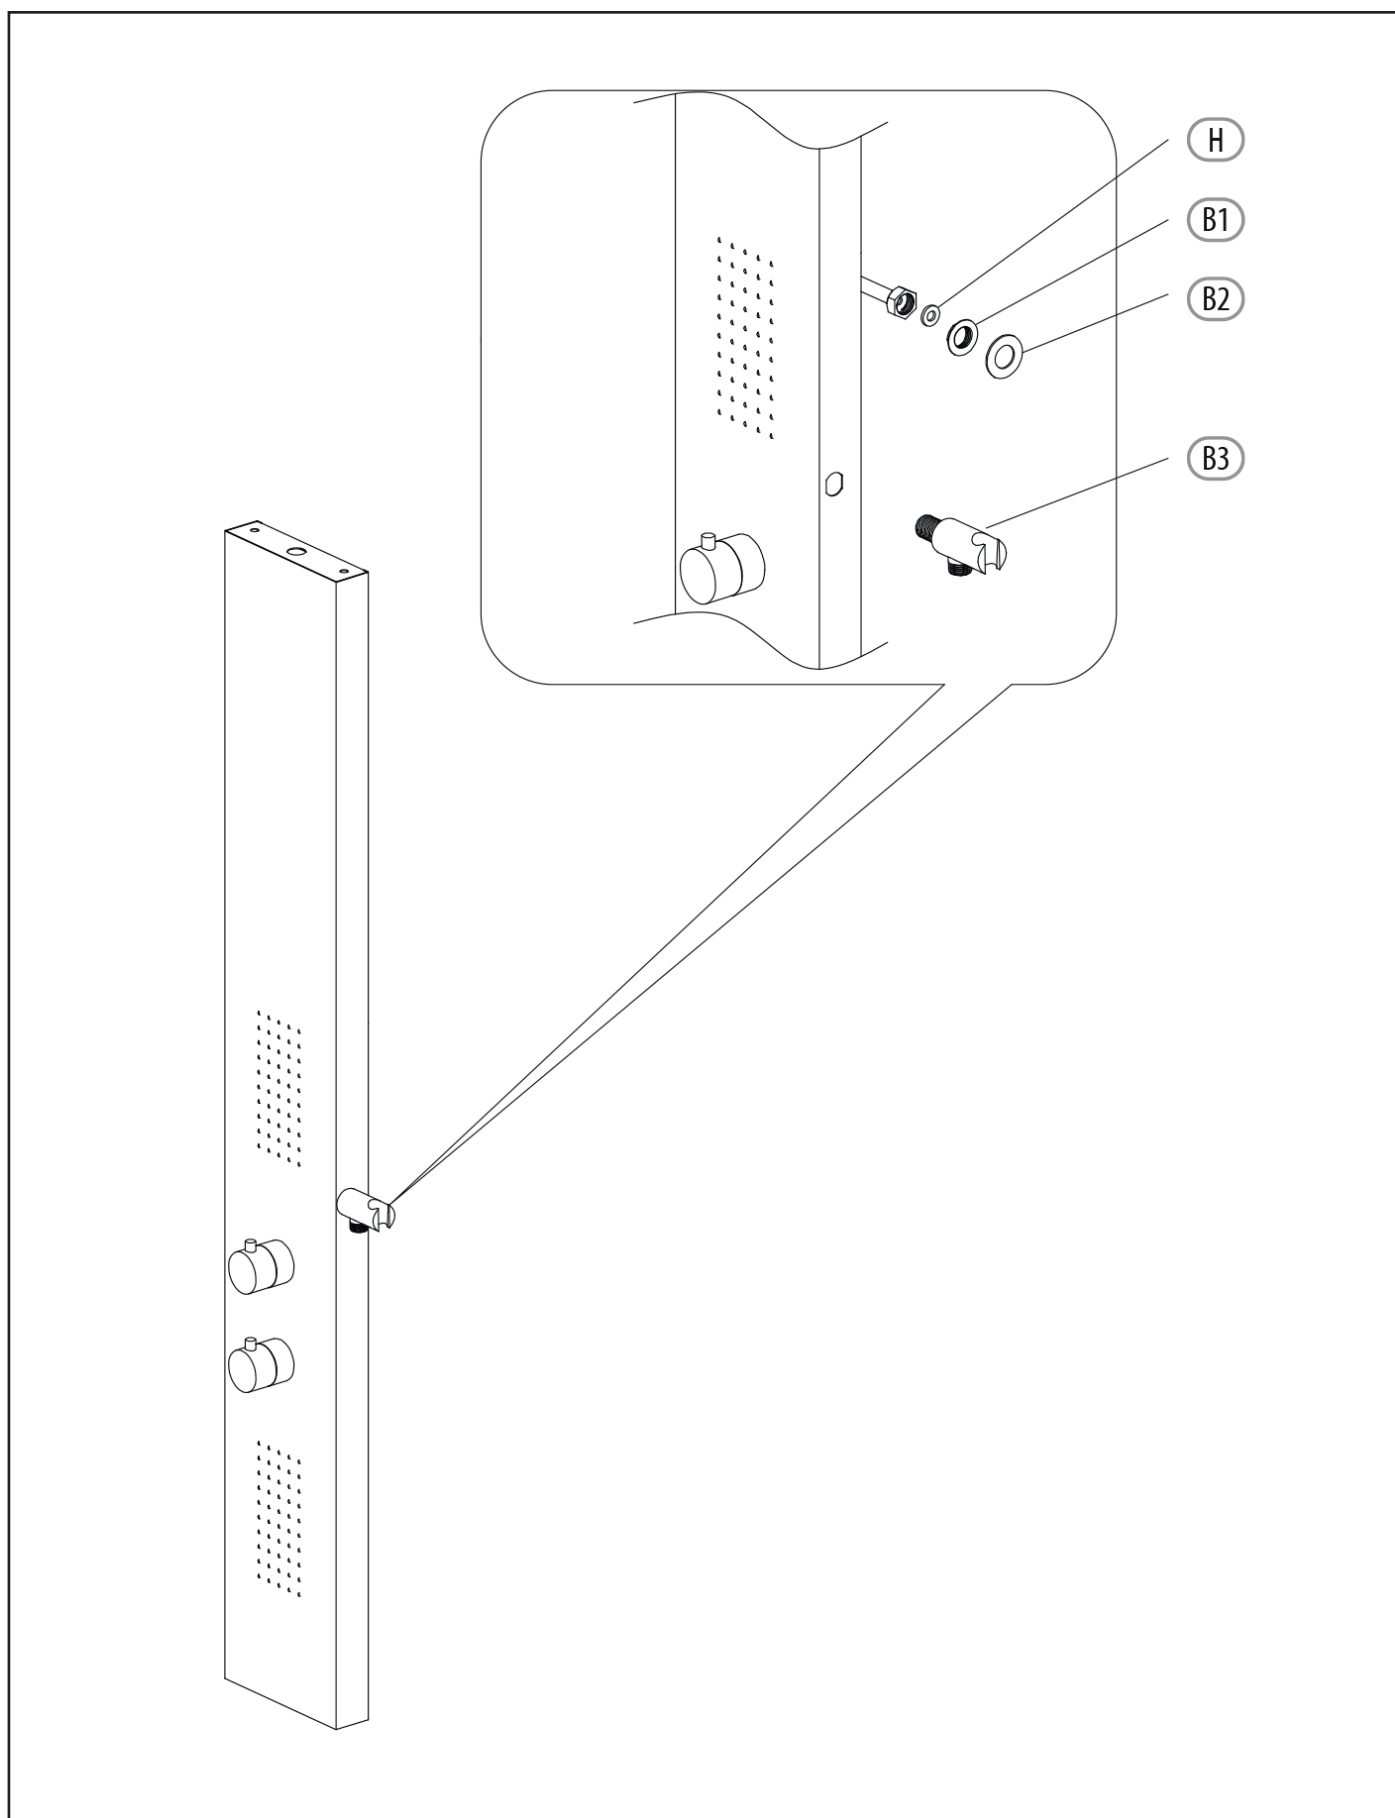



STEP 2

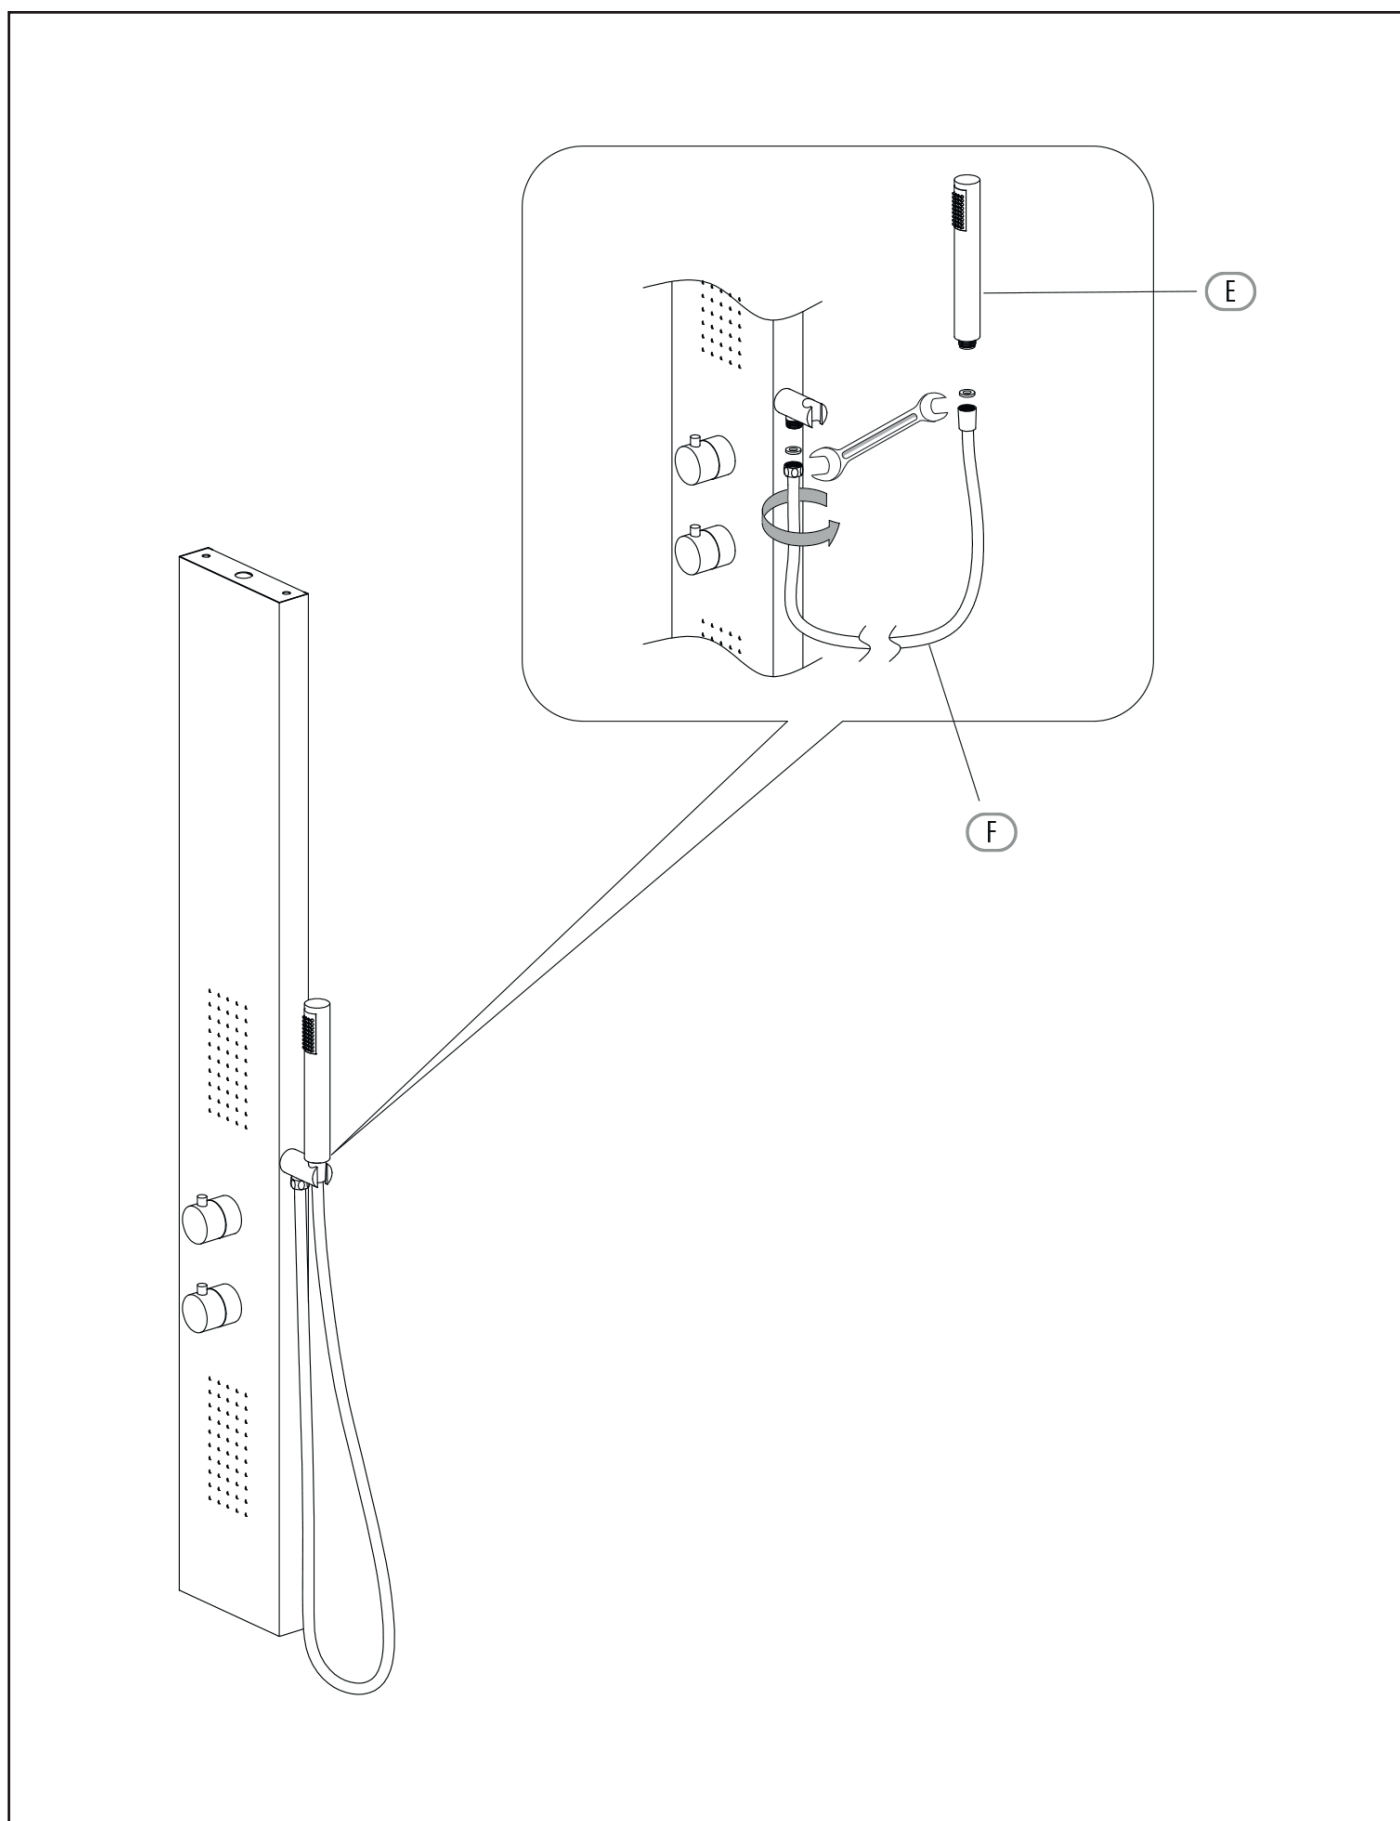

STEP 3

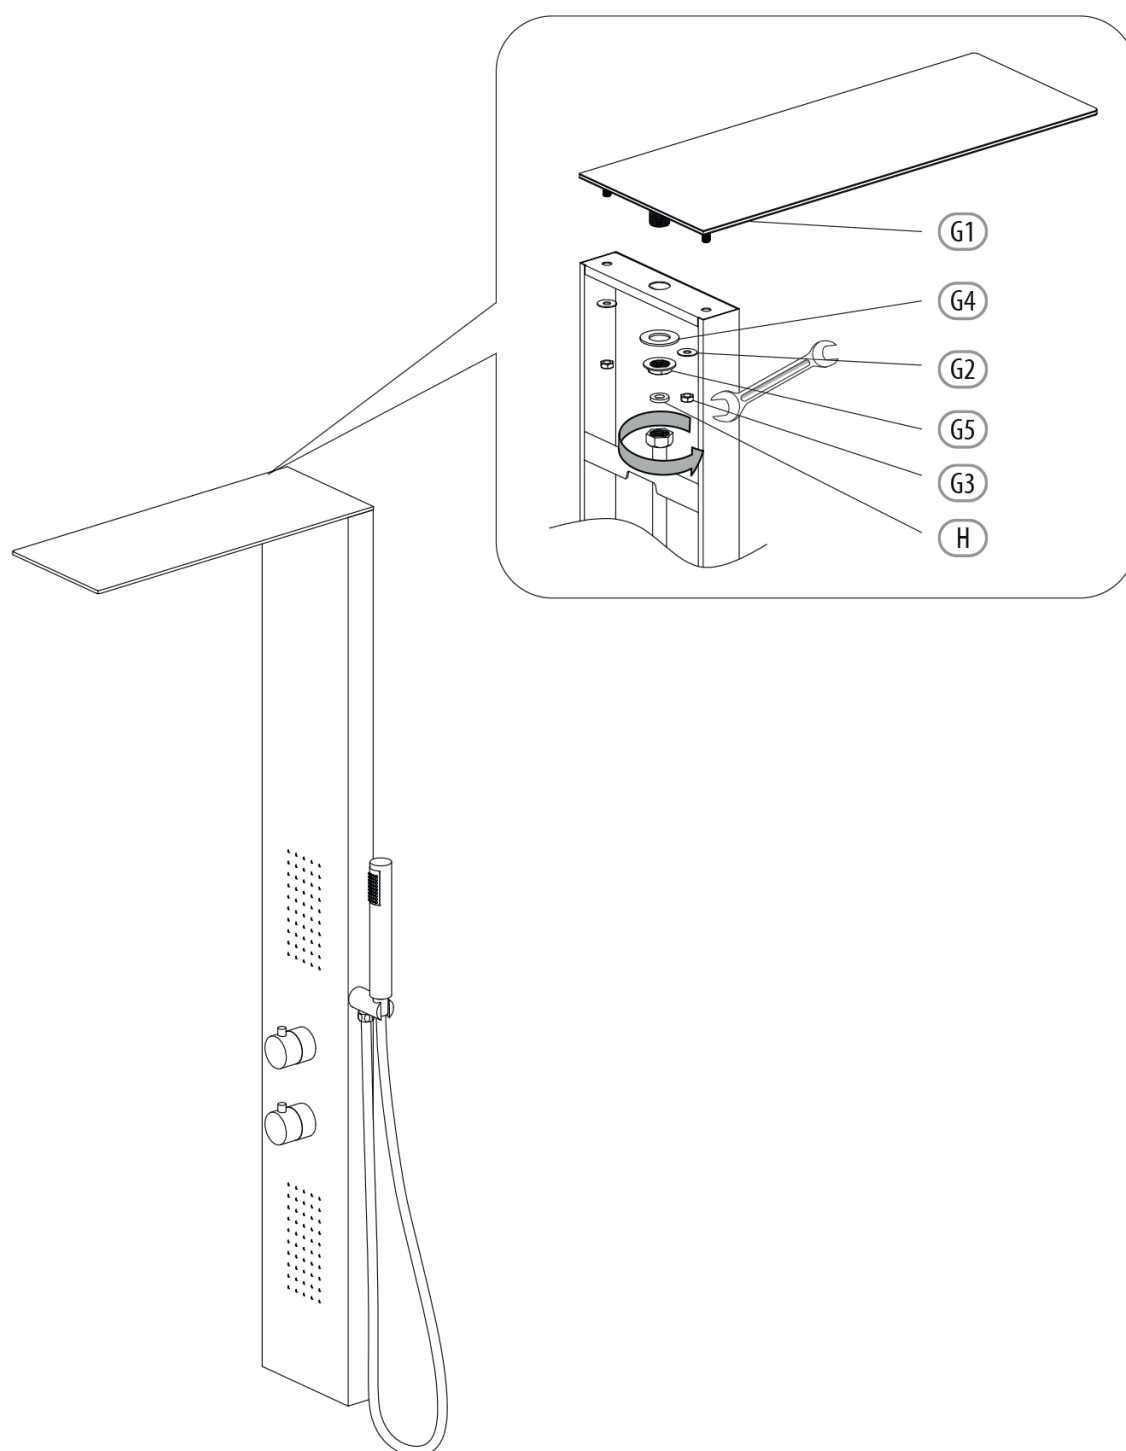

STEP 4

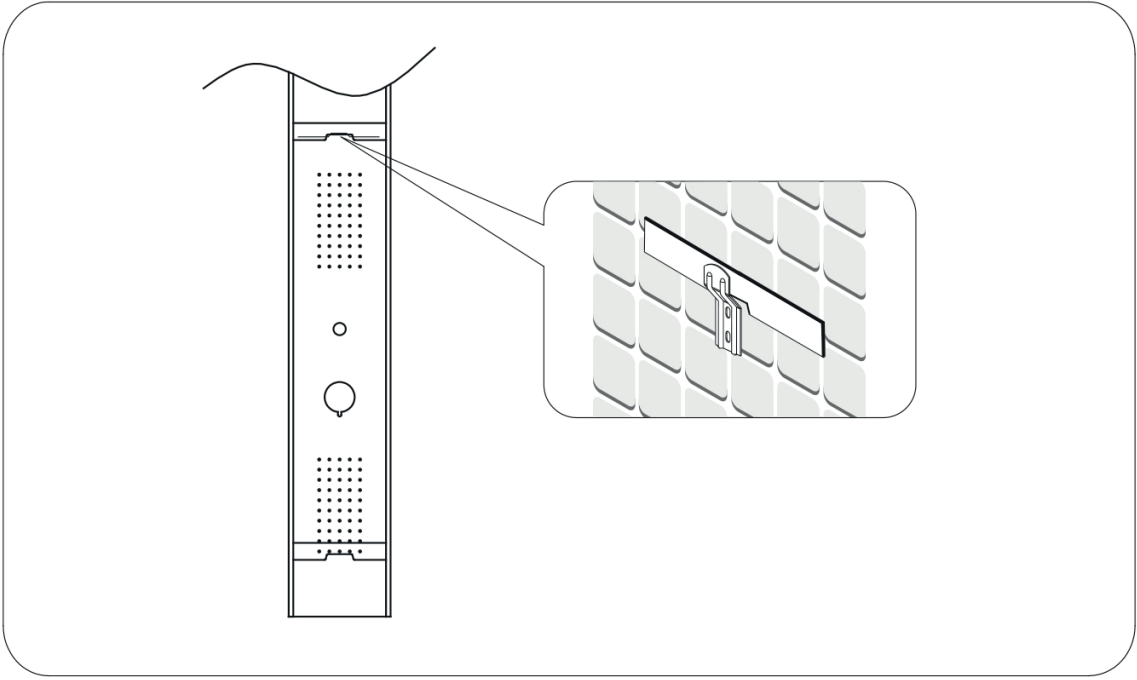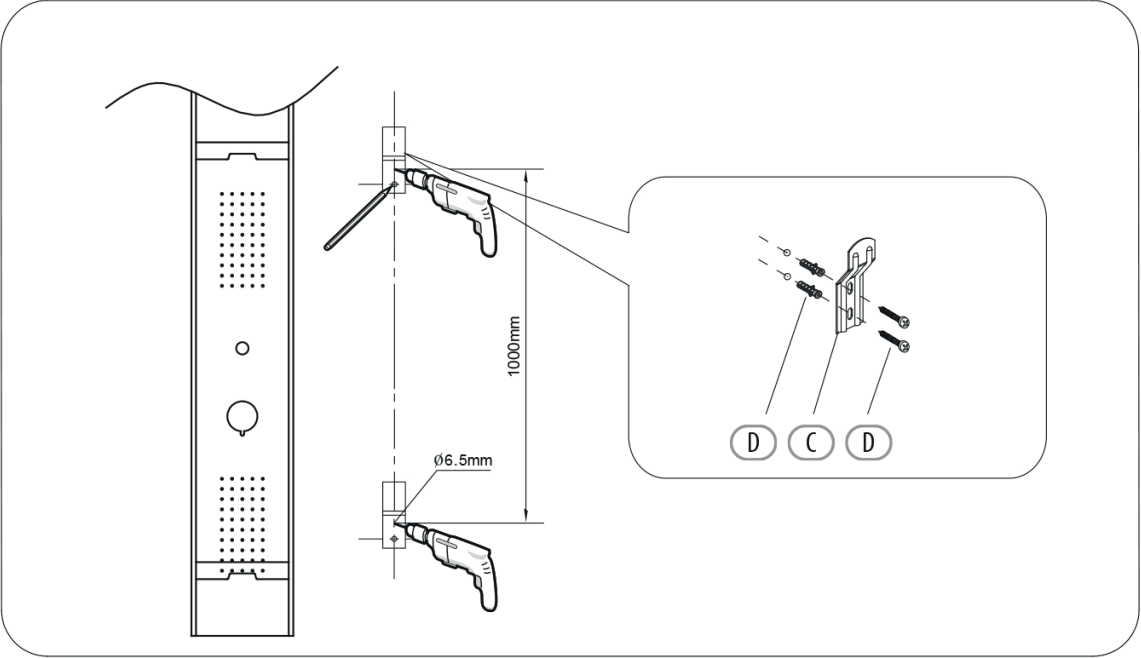

STEP 5

